


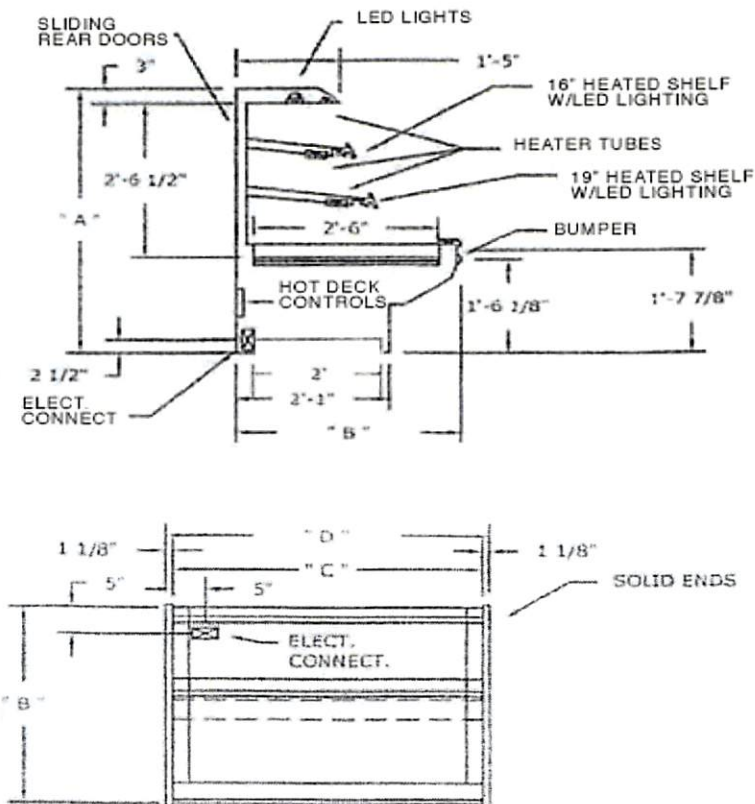

DIMENSIONAL DATA:

CASE LENGTH	DIMENSION "A"	DIMENSION "B"	DIMENSION "C"	DIMENSION "D"	NO. HOT WELLS (IF APPLICABLE)
4 FOOT	4' - 6"	3' - 4"	4' - 0"	4' - 2-3/8"	3 - ZONES
6 FOOT	4' - 6"	3' - 4"	6' - 0"	6' - 2-3/8"	6 - ZONES
8 FOOT	4' - 6"	3' - 4"	8' - 0"	8' - 2-3/8"	6 - ZONES
10 FOOT	4' - 6"	3' - 4"	10' - 0"	10' - 2-3/8"	6 - ZONES
12 FOOT	4' - 6"	3' - 4"	12' - 0"	12' - 2-3/8"	9 - ZONES

ELECTRICAL DATA:

CASE LENGTH	VOLTAGE	PHASE	AMPS	TOTAL LOAD (Kw)	BREAKER	TERMINATION	PLUG TYPE	CORD PROVIDED Y/N	UL LISTED Y/N
4 FOOT	120/208V-5 WIRE	3 PHASE	9.40	3.40	20 AMP		N/A	N	Y
6 FOOT	120/208V-5 WIRE	3 PHASE	17.80	6.40	30 AMP		N/A	N	Y
8 FOOT	120/208V -5 WIRE	3 PHASE	18.40	6.60	30 AMP		N/A	N	Y
10 FOOT	120/208V-5 WIRE	3 PHASE	19.70	7.40	30 AMP		N/A	N	Y
12 FOOT	120/208V-5 WIRE	3 PHASE	27.80	10.00	40 AMP		N/A	N	Y

NOTES:

NOTE: ELECTRICAL IS DIRECT CONNECTION HARD WIRED (NO ELECTRICAL CORD)

NOTE: 5 WIRE SERVICE (3 - HOTS, 1 - NEUTRAL, 1 - GROUND)

NOTE: ALL ZONES ARE DIGITALLY CONTROLLED THROUGH ADVANCED COMPUTER TECHNOLOGY TO INSURE AND MAINTAIN PRODUCT TEMPERATURE AND QUALITY.

RH0122.000_MULTI-DECK HOT

ARCH	MECH	ELEC	REFR	MECH CONST	OWNER
REVIEWED	REVIEWED	REVIEWED	REVIEWED	V-APR	V-APR

9/18/2018

PDSMT# #REF!