
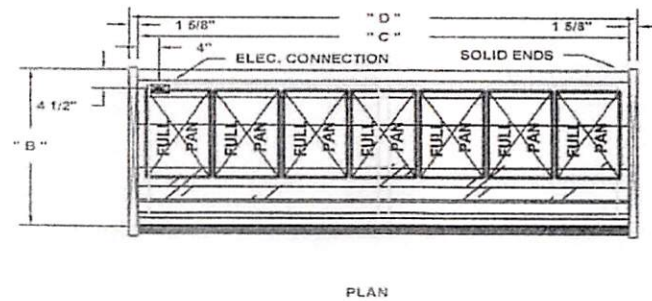


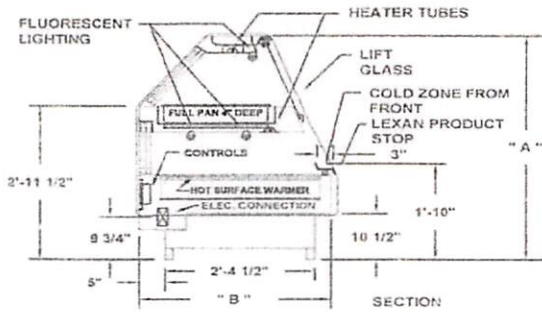

DIMENSIONAL DATA:

CASE LENGTH	DIMENSION "A"	DIMENSION "B"	DIMENSION "C"	DIMENSION "D"	NO. HOT WELLS (IF APPLICABLE)
4 FOOT	4' - 4"	3' - 0-1/2"	4' - 0"	4' - 3-1/4"	3- WELLS
6 FOOT	4' - 4"	3' - 0-1/2"	5' - 9-1/4"	6' - 0-1/2"	5 - WELLS
7 FOOT	4' - 4"	3' - 0-1/2"	6' - 9-3/8"	7' - 0-5/8"	6 - WELLS
8 FOOT	4' - 4"	3' - 0-1/2"	7' - 9-3/8"	8' - 0-5/8"	7 - WELLS
10 FOOT	4' - 4"	3' - 0-1/2"	9' - 8-3/4"	10' - 0"	8 - WELLS
12 FOOT	4' - 4"	3' - 0-1/2"	11' - 9-1/4"	12' - 0-1/2"	10 - WELLS

ELECTRICAL DATA:

CASE LENGTH	VOLTAGE	PHASE	AMPS	TOTAL LOAD (Kw)	BREAKER	TERMINATION	PLUG TYPE	CORD PROVIDED Y/N	UL LISTED Y/N
4 FOOT	120/208V-5 WIRE	3 PHASE	0.00	3.60	20 AMP		N/A	N	
6 FOOT	120/208V-5 WIRE	3 PHASE	0.00	5.39	20 AMP		N/A	N	
7 FOOT	120/208V-5 WIRE	3 PHASE	0.00	7.20	30 AMP		N/A	N	
8 FOOT	120/208V -5 WIRE	3 PHASE	0.00	7.62	30 AMP		N/A	N	
10 FOOT	120/208V-5 WIRE	3 PHASE	0.00	8.20	40 AMP		N/A	N	
12 FOOT	120/208V-5 WIRE	3 PHASE	0.00	10.78	40 AMP		N/A	N	

NOTES:

NOTE: ELECTRICAL IS DIRECT CONNECTION HARD WIRED (NO ELECTRICAL CORD)

NOTE: 5 WIRE SERVICE (3 - HOTS, 1 - NEUTRAL, 1 - GROUND)***** NOTE: ON 12' HOT CASE 2-40 AMPS SERVICE CONNECTIONS ARE REQUIRED*****

NOTE: ALL ZONES ARE DIGITALLY CONTROLLED THROUGH ADVANCED COMPUTER TECHNOLOGY TO ENSURE AND MAINTAIN PRODUCT TEMPERATURE AND QUALITY.

RH0101.000_OVER/UNDER HOT CASE

5/7/2021

ARCH	MECH	ELEC	REFR	MECH CONST	OWNER
REVIEWED	REVIEWED	REVIEWED	REVIEWED	V-APR	O-APR

PDSMT#

#REF!